
FOUR-POST LIFT

FEATURES

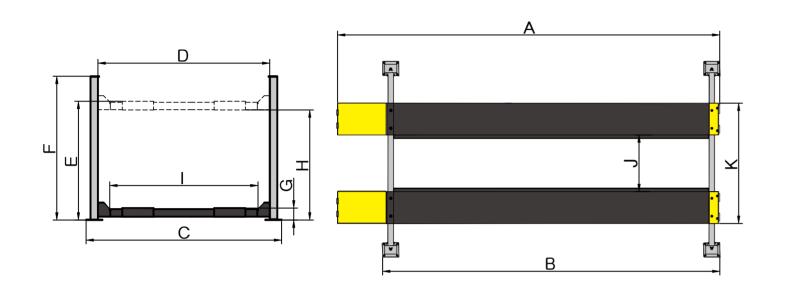

SPECIFICATIONS

ΔMGO_® Lift

Model		430	430E	440	440E
Lifting capacity		13500kg	13500kg	18000kg	18000kg
lifting time		116S	116S	160S	160S
Overall Length (Inc. Ramps)	Α	7800mm	9300mm	9300mm	10800mm
Overall Length (No Ramps)	В	6514mm	8014mm	8014mm	9514mm
Overall Width	С	3794mm	3794mm	4100mm	4100mm
Width Between Posts	D	3348mm	3348mm	3654mm	3654mm
Max.Lifting Height	E	1900mm	1900mm	1900mm	1900mm
Overall Height	F	2332mm	2332mm	2332mm	2332mm
Minimum Height	G	265mm	265mm	265mm	265mm
Max. Underneath Height	Н	1674mm	1674mm	1674mm	1674mm
Drive-Thru Clearance	Ι	2992mm	2992mm	3298mm	3298mm
Width Between Runways	J	1390mm	1390mm	1496mm	1496mm
Outside Edge of Runways	К	2610mm	2610mm	2916mm	2916mm
Motor		4.0HP	4.0HP	4.0HP	4.0HP
Gross Weight		2442kg	3098kg	3784kg	4234kg

AMGO_® Lift FOUR-POST **HEAVY-DUTY** FOUR POST LIFT

With great performance, this is the perfect lift to meet the needs of garage and shop owners.





www.amgolift.com

CE

ΔMGO_® Lift

FOUR-POST **HEAVY-DUTY** FOUR POST LIFT

AMGO four post lift are made stronger, more versatile, and easier to use.

FEATURES

- Electric-air control operation system.
- Air-released safety lock for convenient operation and reliability.
- Mechanica elf-locking device and cable-breaking protection.
- 3/4" aircraft quality synchronization cable.
- Skid proof diamond platform.
- Hydraulic cylinders are designed to high standards using high quality NOK seals.
- Strict quality control of cylinders with flow restrictors to keep a constant speed.
- Optional Rolling Jacks:

RJ-20A 15,000lbs capacity with pneumatic pump.





With C.E. stop switch at 300mm from ground and alarm tone when lowering down from 300mm to ground make the lift more safety.



Oil-water separator and Solenoid air valve are installed on the power side column.



Optional Rolling Jack RJ-20A pneumatic hydraulic type 9.0T.




Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump. Kits No.:40106



Kits No.:43001



FOUR-POST LIFT



Double-safety locks