


FOUR-POST LIFT

FEATURES

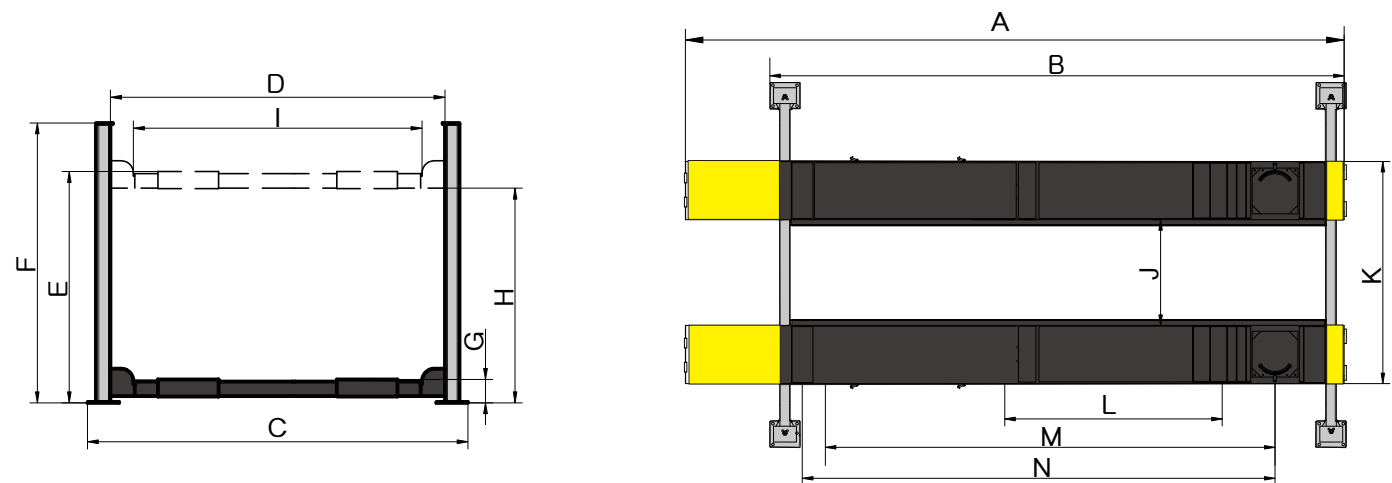

SPECIFICATIONS

Model		A465	A465A	A465E	A465AE	A480	A480A
Style		Non-Alignment	Alignment	Non-Alignment	Alignment	Non-Alignment	Alignment
Lifting capacity		6500kg	6500kg	6500kg	6500kg	8000kg	8000kg
lifting time		76S	76 S	76S	76 S	118S	118 S
Overall Length (Inc. Ramps)	A	6541mm	6528mm	7265mm	7252mm	7449mm	7436mm
Overall Length (No Ramps)	B	5500mm	5500mm	6224mm	6224mm	6408mm	6408mm
Overall Width	C	3324mm	3324mm	3324mm	3324mm	3482mm	3482mm
Width Between Posts	D	2946mm	2946mm	2946mm	2946mm	3108mm	3108mm
Max. Lifting height	E	1865mm	1915mm	1865mm	1915mm	1865mm	1915mm
Overall Height	F	2185mm	2185mm	2185mm	2185mm	2185mm	2185mm
Minimum Height	G	200mm	250mm	200mm	250mm	200mm	250mm
Max. Underneath Height	H	1695mm	1695mm	1695mm	1695mm	1692mm	1692mm
Drive-Thru Clearance	I	2592mm	2592mm	2592mm	2592mm	2750mm	2750mm
Width Between Runway	J	1194mm-Max.1385mm	1194mm-Max.1385mm	1194mm-Max.1385mm	1194mm-Max.1385mm	1302mm	1302mm
Outside Edge of Runways	K	2210mm-Max.2401mm	2210mm-Max.2401mm	2210mm-Max.2401mm	2210mm-Max.2401mm	2418mm	2418mm
Min. Four Wheel Align	L	/	2350mm	/	2350mm	/	2530mm
Max. Four Wheel Align	M	/	4310mm	/	4310mm	/	4640mm
Min. Two Wheel Align	N	/	4450mm	/	5170mm	/	5310mm
Motor		4.0HP	4.0HP	4.0HP	4.0HP	4.0HP	4.0HP
Gross Weight		1288kg	1550kg	1345kg	1655kg	1602kg	2019kg

AMGO® Lift



FOUR- POST COMMERCIAL LIFT

AMGO heavy-duty four post lifts are best choice for heavy duty vehicles or trucks in commercial shops...stronger and faster!



**A465 A465A A465E
A465AE A480 A480A**

AMGO® Lift

www.amgolift.com



FOUR- POST

COMMERCIAL LIFT


AMGO powerful 4-post lift provides a generous lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types and wheel bases.

FEATURES

- Electric-air control operation system.
- Mechanical self-lock and air-driven safety release.
- Electrical hydraulic power system, cable-driven.
- Skid proof diamond platform.
- Two adjustable turntable positions to accommodate different wheel base.
- Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 1194mm and maximum distance is 1385mm. Only (A465 A465A).
- Dual safety device: In case the primary safety locks are out of operation, the lift would also be locked automatically by a second safety device.

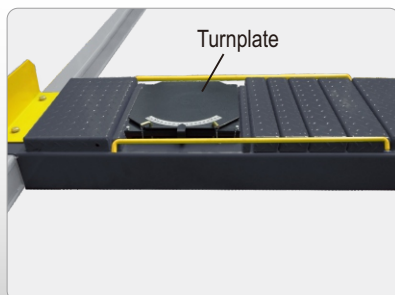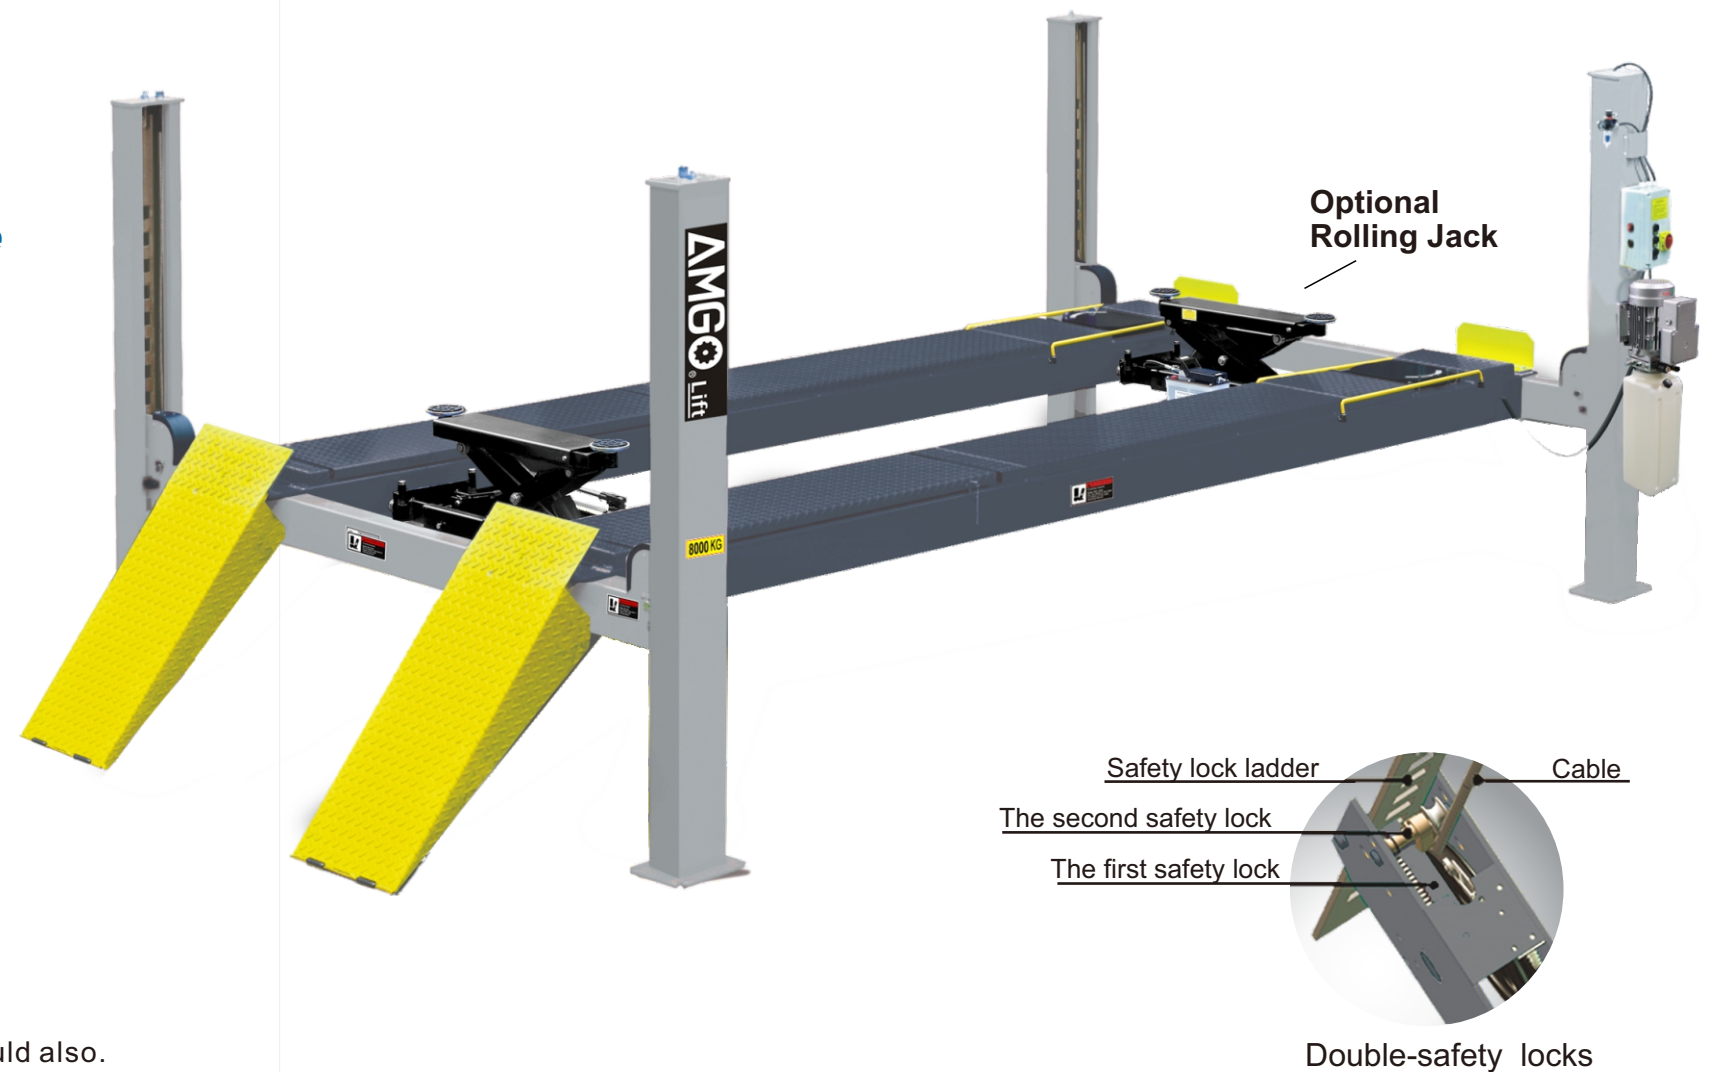

Adjustable turnplate blocks to fit various wheel bases vehicles.

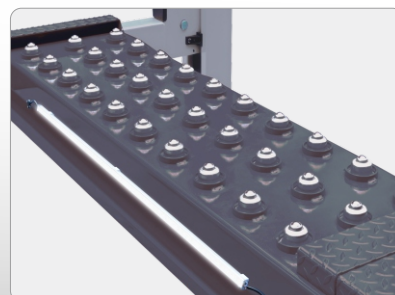


New rear-slip ball sets.
Optional LED light kits is fitted for every model of AMGO 4-post lifts.
LED Kits No.:40104



Optional Rolling Jack
J6H: manual hydraulic type 2,800kg
J6A: pneumatic hydraulic type 2,800kg
RJ-8A: pneumatic hydraulic type 3,500kg
RJ-10A: pneumatic hydraulic type 4,500kg.



Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.
Kits No.:40102

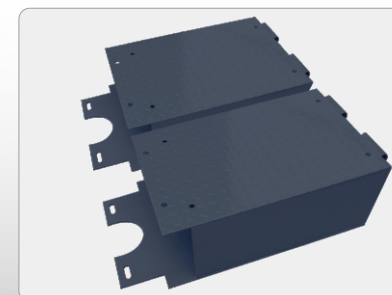

Optional platform extension kits adds an extra 660mm length to the platform.
Kits No.:41403(A465 A465A)
Kits No.:41801(A480 A480A).



Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905(A465A)
(used with kits 41403)



Optional adjustable blocks for alignment 4 post lift.
Kits No.: 41803(A480A)
(used with kits 40801)