


FOUR-POST LIFT

FEATURES

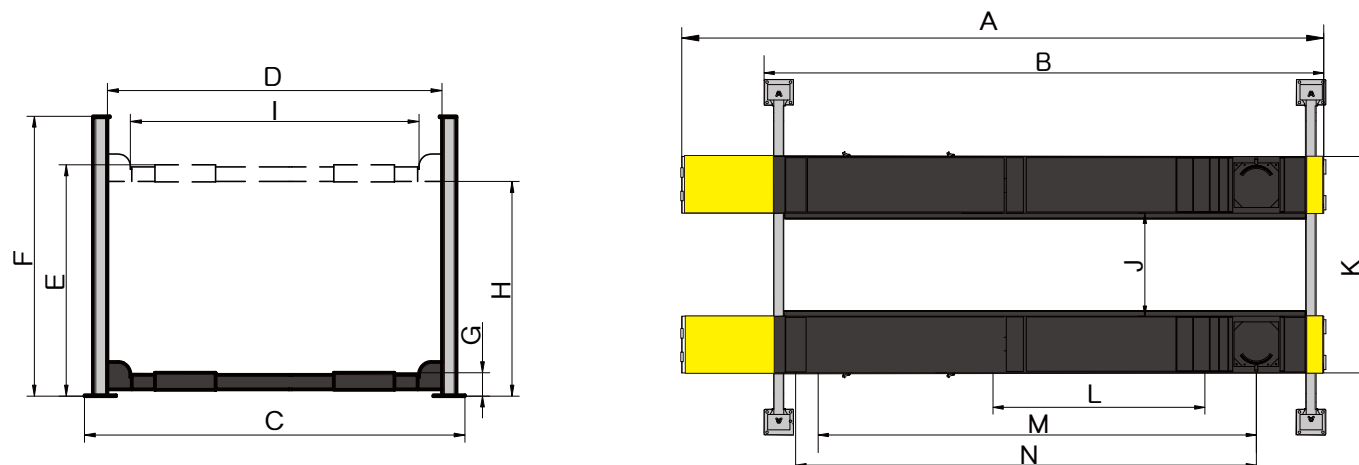

SPECIFICATIONS

Model		A440	A440A	A455	A455A
Style		General service	Alignment	General service	Alignment
Lifting capacity		4000kg	4000kg	5500kg	5500kg
Lifting time		45S	45S	63S	63S
Overall Length (Inc. Ramps)	A	5512mm	5512mm	6012mm	6012mm
Overall Length (No Ramps)	B	4600mm	4600mm	5100mm	5100mm
Overall Width	C	3208mm	3208mm	3208mm	3208mm
Width Between Columns	D	2852mm	2852mm	2852mm	2852mm
Max. Lifting Height	E	1870mm	1920mm	1870mm	1920mm
Max. Lifting Height to top of runway	E	1800mm	1850mm	1800mm	1850mm
Overall Height	F	2185mm	2185mm	2185mm	2185mm
Minimum Height	G	170mm	220mm	170mm	220mm
Max. Underneath Height	H	1730mm	1730mm	1730mm	1730mm
Max. Lock Underneath runway	H	1660mm	1660mm	1660mm	1660mm
Drive-Thru Clearance	I	2498mm	2498mm	2498mm	2498mm
Width Between Runway	J	1100mm	1100mm	1100mm	1100mm
	J	85mm~Max.1300mm	85mm~Max.1300mm	1000mm~Max.1300mm	1000mm~Max.1300mm
Outside Edge of Runways	K	2116mm	2116mm	2116mm	2116mm
	K	1101mm~Max.2316mm	1101mm~Max.2316mm	1101mm~Max.2316mm	1101mm~Max.2316mm
Min. Four Wheel Align	L	/	2000mm	/	2000mm
Max. Four Wheel Align	M	/	3460mm	/	4000mm
Max. Two Wheel Align	N	/	3600mm	/	4150mm
Motor		3.0HP	3.0HP	3.0HP	3.0HP
Gross Weight		921kg	1149kg	1276kg	1334kg

AMGO Lift



FOUR- POST COMMERCIAL LIFT

With great performance, this is the perfect lift to meet the needs of garage and shop owners.



**A440 A440A
A455 A455A**

AMGO Lift

www.amgolift.com



FOUR- POST

COMMERCIAL LIFT


AMGO four post lift are made stronger, more versatile, and easier to use.

FEATURES

- Electro-air control operation system.
- Mechanical self-lock and air-driven safety release.
- Electrical hydraulic power system, cable-driven.
- Skid proof diamond platform.
- Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 1100mm and maximum distance is 1300mm.
- Dual safety device: In case the primary safety locks are out of operation, the lift would also be locked automatically by a second safety device.
- Adjustable turnplate positions to fit the different wheel base.

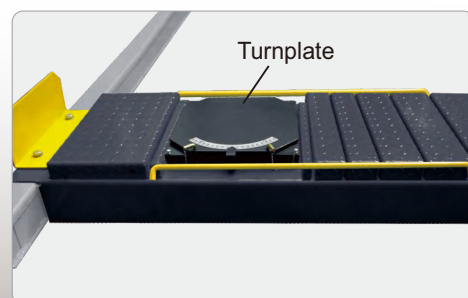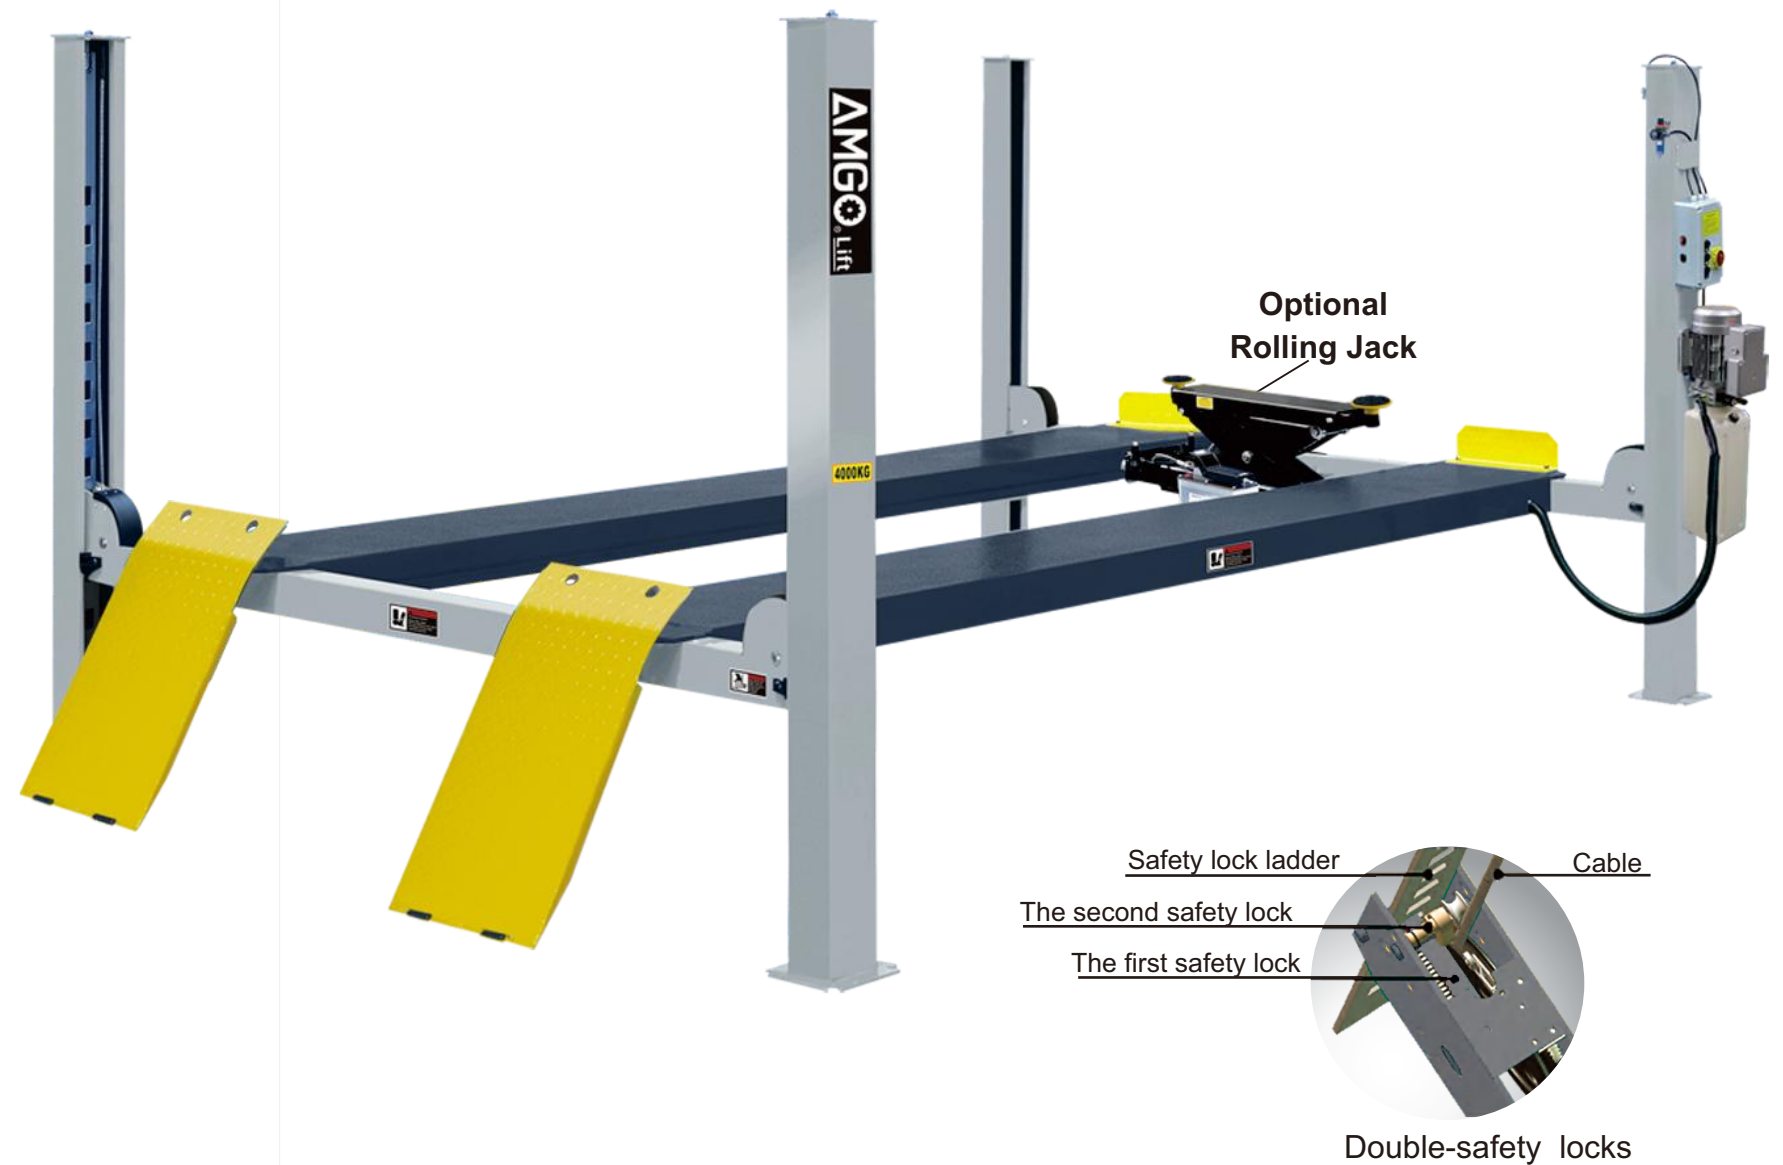

Adjustable turnplate blocks to fit various wheel bases vehicles.

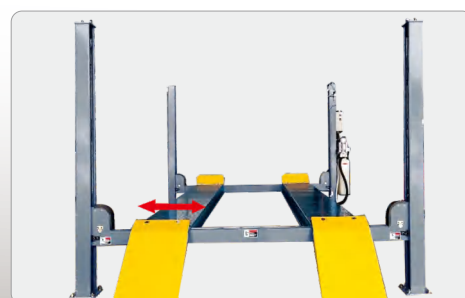


Off-side platform can be adjusted the mounting position left or right.



Optional Rolling Jack
J6H: manual hydraulic type 2,800kg
J6A: pneumatic hydraulic type 2,800kg
RJ-8A pneumatic hydraulic type 3,500kg.



Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump.
Kits No.:40102

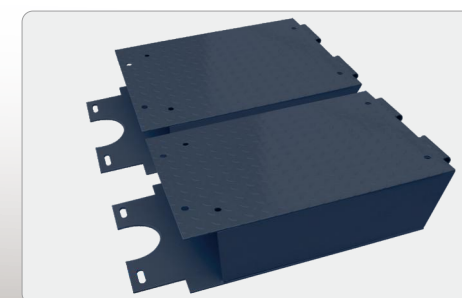

Optional platform extension kits adds an extra 660mm length to the platform.
Kits No.40903, For models A440 A440A
Kits No.41203, For models A455 A455A



Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905
(used with kits 40903 or 41203)