


FOUR-POST LIFT

FEATURES

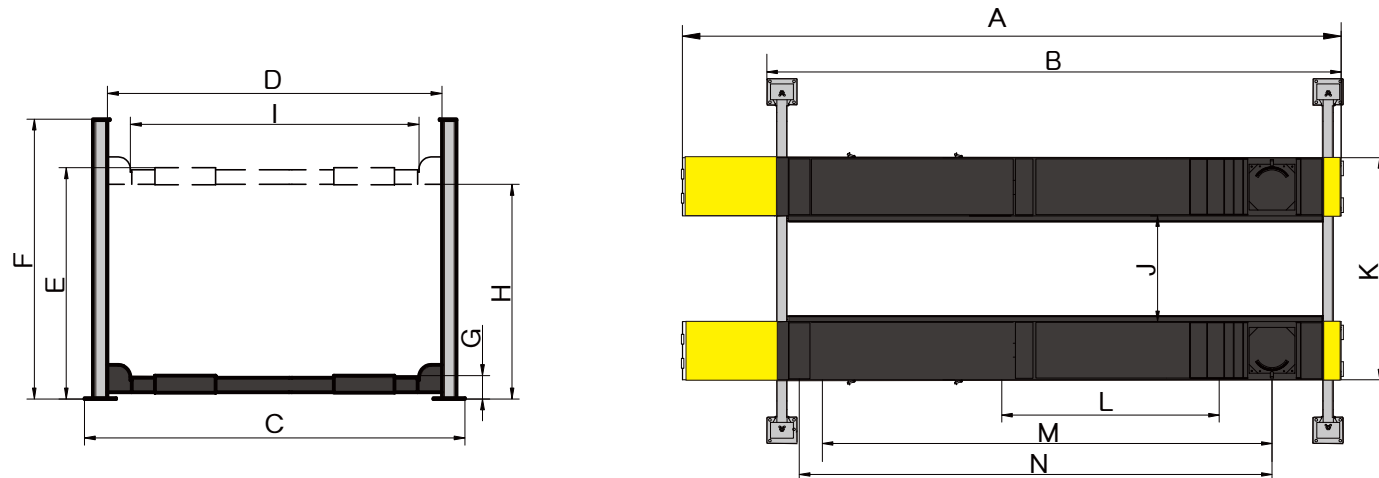

SPECIFICATIONS

Model		A465	A465A	A480	A480A
Style		General service	Alignment	General service	Alignment
Lifting capacity		6500kg	6500kg	8000kg	8000kg
Lifting time		79S	79S	81S	81S
Overall Length (Inc. Ramps)	A	6541mm	6528mm	7449mm	7436mm
Overall Length (No Ramps)	B	5500mm	5500mm	6408mm	6408mm
Overall Width	C	3324mm	3324mm	3482mm	3482mm
Width Between Columns	D	2946mm	2946mm	3108mm	3108mm
Max. Lifting Height	E	1900mm	1950mm	1900mm	1950mm
Max. Lifting Height to top of runway		1830mm	1880mm	1830mm	1880mm
Overall Height	F	2189mm	2189mm	2189mm	2189mm
Minimum Height	G	200mm	250mm	200mm	250mm
Max. Underneath Height	H	1730mm	1730mm	1730mm	1730mm
Max. Lock Underneath runway		1660mm	1660mm	1660mm	1660mm
Drive-Thru Clearance	I	2592mm	2592mm	2750mm	2750mm
Width Between Runway	J	1194mm	1194mm	1302mm	1302mm
		85mm~Max.1385mm	85mm~Max.1385mm	85mm~Max.1468mm	85mm~Max.1468mm
Outside Edge of Runways	K	2210mm	2210mm	2418mm	2418mm
		1101mm~Max.2401mm	1101mm~Max.2401mm	1201mm~Max.2584mm	1201mm~Max.2584mm
Min. Four Wheel Align	L	/	2396mm	/	2530mm
Max. Four Wheel Align	M	/	4310mm	/	4640mm
Max. Two Wheel Align	N	/	4472mm	/	5310mm
Motor		3.0HP	3.0HP	3.0HP	3.0HP
Gross Weight		1272kg	1544kg	1596kg	2019kg

AMGO Lift



FOUR- POST

COMMERCIAL LIFT

AMGO heavy-duty four post lifts are best choice for heavy duty vehicles or trucks in commercial shops...stronger and faster!



**A465 A465A
A480 A480A**

AMGO Lift

www.amgolift.com


FOUR- POST

COMMERCIAL LIFT


AMGO powerful 4-post lift provides a generous lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types and wheel bases.

FEATURES


- Electric-air control operation system.
- Mechanical self-lock and air-driven safety release.
- Electrical hydraulic power system, cable-driven.
- Skid proof diamond platform.
- Two adjustable turntable positions to accommodate different wheel base.
- Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 1194mm and maximum distance is 1385mm. Only (A465 A465A).
- Dual safety device: In case the primary safety locks are out of operation, the lift would also be locked automatically by a second safety device.

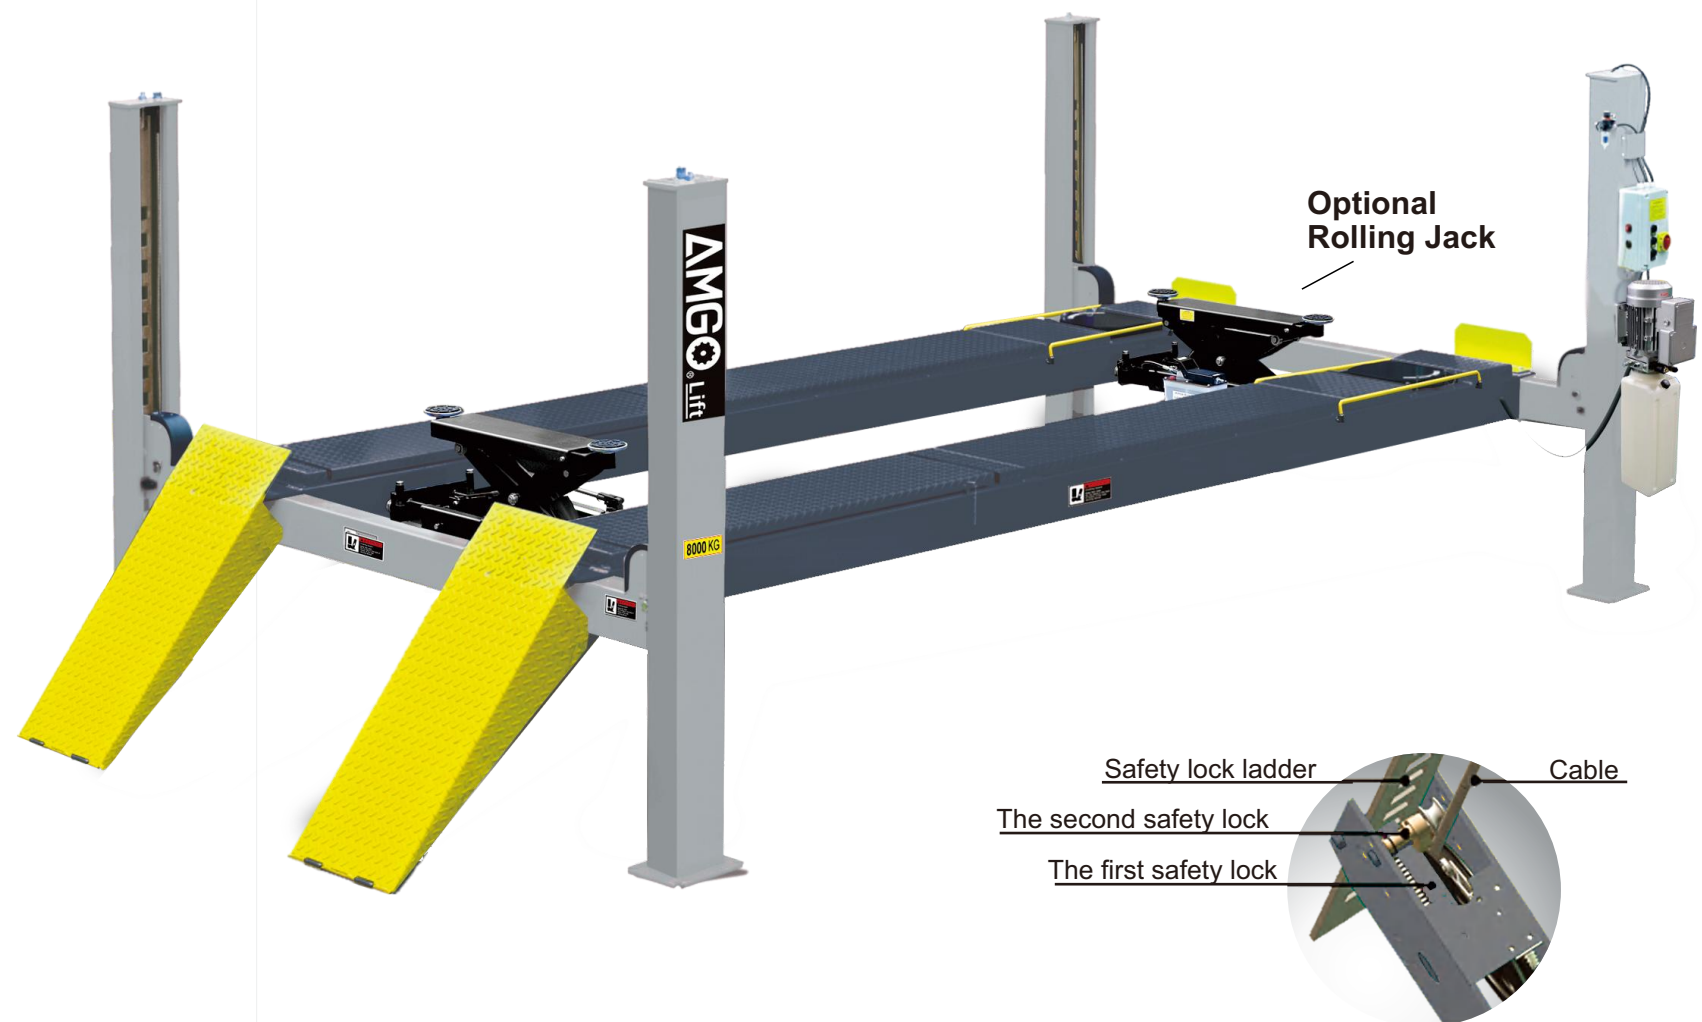

Double-safety locks

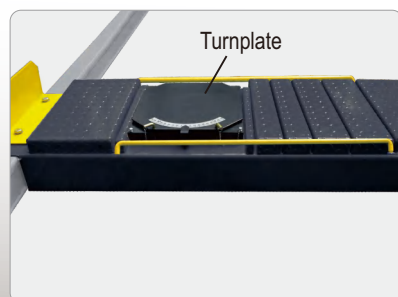

Adjustable turnplate blocks to fit various wheel bases vehicles.

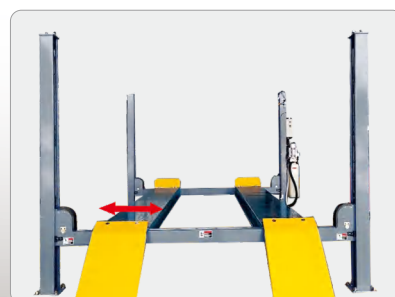


Off-side platform can be adjusted the mounting position left or right.



Optional Rolling Jack
J6H: manual hydraulic type 2,800kg
J6A: pneumatic hydraulic type 2,800kg
RJ-8A: pneumatic hydraulic type 3,500kg
RJ-10A: pneumatic hydraulic type 4,500kg.



Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.
Kits No.:40102

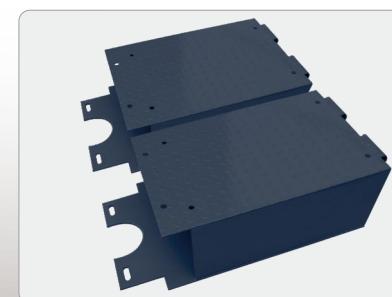

Optional platform extension kits adds an extra 660mm length to the platform.
Kits No.:41403(A465 A465A)
Kits No.:41801(A480 A480A).



Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905(A465A)
(used with kits 41403)



Optional adjustable blocks for alignment 4 post lift.
Kits No.: 41803(A480A)
(used with kits 40801)