


# FOUR-POST LIFT

## FEATURES

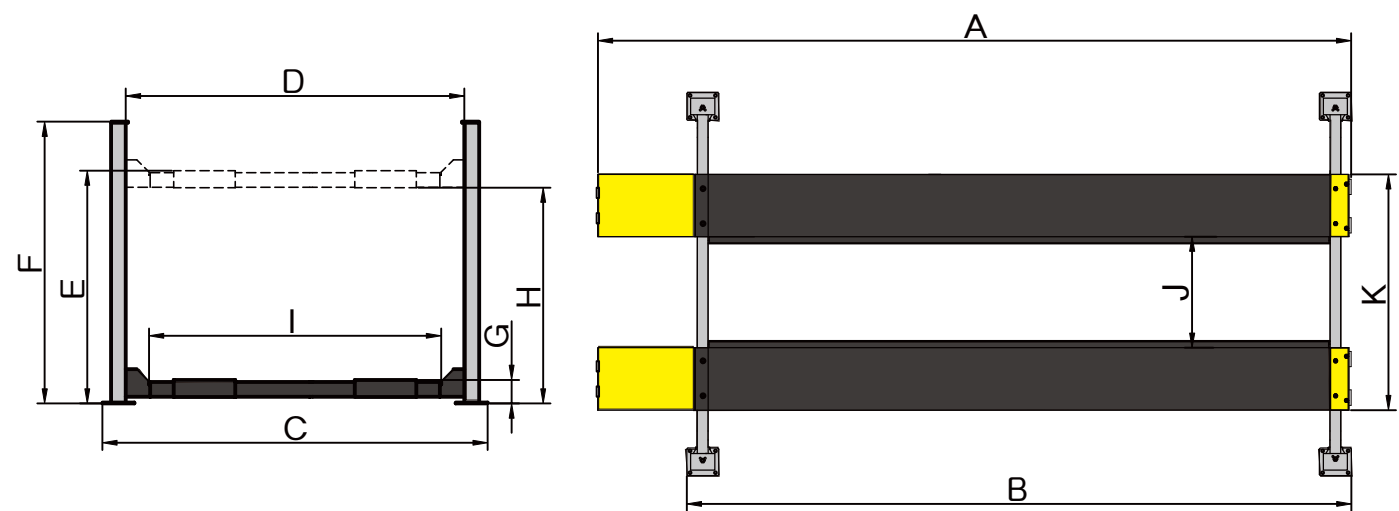

## SPECIFICATIONS

Model		430	430E	440	440E
Lifting capacity		13500kg	13500kg	18000kg	18000kg
lifting time		116S	116S	160S	160S
Overall Length ( Inc Ramps)	A	7800mm	9300mm	9300mm	10800mm
Overall Length ( No Ramps)	B	6514mm	8014mm	8014mm	9514mm
Overall Width	C	3794mm	3794mm	4100mm	4100mm
Width Between Columns	D	3348mm	3348mm	3654mm	3654mm
Max. Lifting Height	E	1890mm	1890mm	1890mm	1890mm
Max. Lock Height to top of runway		1820mm	1820mm	1820mm	1820mm
Overall Height	F	2332mm	2332mm	2332mm	2332mm
Minimum Height	G	265mm	265mm	265mm	265mm
Max. Underneath Height	H	1664mm	1664mm	1664mm	1664mm
Max. Lock Underneath runway		1595mm	1595mm	1595mm	1595mm
Drive-Thru Clearance	I	2992mm	2992mm	3298mm	3298mm
Width Between Runways	J	1140mm/1390mm	1140mm/1390mm	1246mm/1496mm	1140mm/1496mm
Outside Edge of Runways	K	2360mm/2610mm	2360mm/2610mm	2666mm/2916mm	2666mm/2916mm
Motor		4.0HP	4.0HP	4.0HP	4.0HP
Gross Weight		2490kg	3040kg	3784kg	4234kg



## FOUR- POST HEAVY-DUTY FOUR POST LIFT

*With great performance, this is the perfect lift to meet the needs of garage and shop owners.*



**430 430E  
440 440E**



[www.amgolift.com](http://www.amgolift.com)


FOUR- POST

# HEAVY-DUTY FOUR POST LIFT

*AMGO four post lift are made stronger, more versatile, and easier to use.*

## FEATURES

- Electric-air control operation system.
- Air-released safety lock for convenient operation and reliability.
- Mechanical self-locking device and cable-breaking protection.
- 3/4" aircraft quality synchronization cable.
- Skid proof diamond platform.
- Hydraulic cylinders are designed to high standards using high quality NOK seals.
- Strict quality control of cylinders with flow restrictors to keep a constant speed.
- Optional Rolling Jacks:  
RJ-20A 15,000lbs capacity with pneumatic pump.

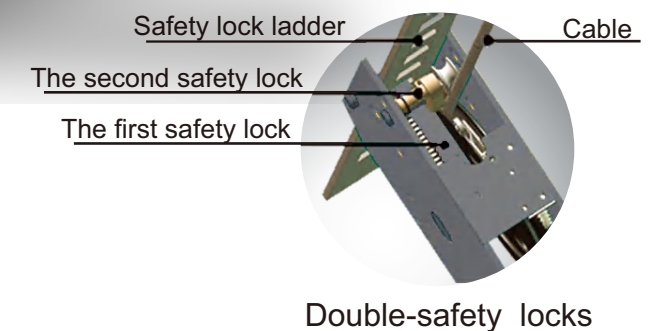

Electric control device With **UP**, **LOCK** and **DOWN** buttons  
With C.E. stop switch at 300mm from ground and alarm tone when lowering down from 300mm to ground make the lift more safety.




Oil-water separator and Solenoid air valve are installed on the power side column.



Optional Rolling Jack  
RJ-20A pneumatic hydraulic type 9.0T.



Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump.  
Kits No.:40106

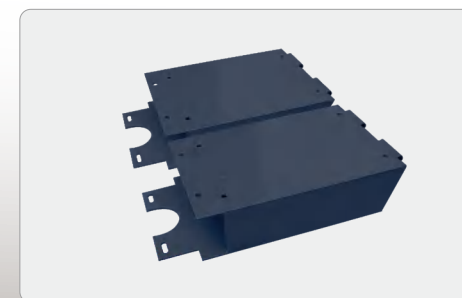

Optional platform extension kits add an extra 610mm (24") length to the platform.  
Kits No.:43001



Optional LED lighting: 24V LED light.  
Kits No.:40104