

FOUR POST PARKING LIFTS


The ultimate fusion of engineering and performance, AMGO leads the way in innovation with our commercial-grade parking lift solutions. Combining robust construction with exclusive patented technologies, including the patented concealed lock control system, these lifts maximize space efficiency and provide unrivalled parking convenience with enhanced stability, durability and reliability.



A430-P/ A430-HP
A435-P/ A435-HP/ A440-HP

FOUR POST LIFT

SPECIFICATIONS

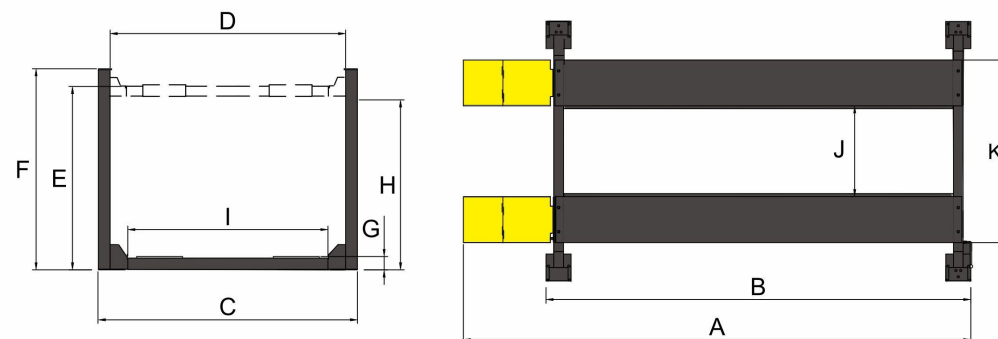

Model		A430-P	A430-HP	A435-P	A435-HP	A440-HP
Lifting capacity		3000kg	3000kg	3500kg	3500kg	4000kg
lifting time		31S	35S	40S	46S	67S
Overall Length (Inc Ramps)	A	4720mm	5008mm	5285mm	5285mm	6049mm
Outside edge of crossbeams	B	3700mm	3987mm	4258mm	4258mm	5022mm
Overall Width	C	2409mm	2409mm	2604mm	2604mm	2777mm
Width Between Posts	D	2167mm	2167mm	2358mm	2358mm	2531mm
Max. Lifting Height	E	1865mm	2207mm	1872mm	2227mm	2237mm
Max. Locking Height		1795mm	2137mm	1802mm	2157mm	2167mm
Overall Height	F	2105mm	2455mm	2105mm	2455mm	2455mm
Minimum Height	G	125mm	125mm	145mm	145mm	155mm
Max. Underneath Height		1765mm	2107mm	1752mm	2107mm	2097mm
Max. Lock Underneath runway	H	1695mm	2037mm	1682mm	2037mm	2027mm
Drive-Thru Clearance	I	1956mm	1956mm	2074mm	2074mm	2247mm
Width Between Runways	J	940mm	940mm	940mm	940mm	1077mm
Outside Edge of Runways	K	1890mm	1890mm	1890mm	1890mm	2093mm
Motor		3.0HP	3.0HP	3.0HP	3.0HP	3.0HP
Gross Weight		658kg	695kg	715kg	757kg	894kg


FOUR POST LIFT



EXCLUSIVE FEATURE
Double-S shape column



Standard remote control operation ensures convenient use.



Commercial double safety locks provide additional safety.

A430-P (3000KG) **A430-HP (3000KG)** **A435-P (3500KG)** **A435-HP (3500KG)**

FEATURES

- Commercial grade, with CE certification;
- AMGO patented concealed safety lock control with single-point manual release;
- Double-S shaped columns for enhanced strength;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection;
- Standard remote control operation ensures convenient use;
- Support back to back installation to improve space efficiency;
- Integrated non-skid diamond platforms;
- Foldable drive-on ramps;
- A limit switch is fitted as standard to enhance safety.
- High quality hydraulic cylinder design and manufactured at high standard.




A440-HP (4000KG)



Patented concealed safety lock control device with single-point manual lock release.
Patent No.: ZL 2023 2 3215814.0



Support back to back installation to improve space efficiency.



Double safety locks provide additional safety.



Optional plastic oil tray (1 set, 4pcs)




Optional adjustable Jack Tray (adj. range: 920-1181mm).
Kits no. 40816.



Optional Caster Kits (1 set, 4pcs) help easily maneuver the parking lift.
Kits No.: 40801



Optional rubber wheel chock.
P/N: 40811.



Optional extended aluminum alloy drive-in ramps.



Optional Jack with hand pump and 2.5" adapters. J5H sliding jack for A430-P, A430-HP, A435-P, A435-HP. J6H rolling jack for A440-HP.