




FOUR POST LIFT

Designed to rigorous commercial standards and backed by CE certification, the AMGO four post lift range provides the ultimate in operational safety for garage and workshop environments. These lifts feature robust double safety locks and stepless adjustable diamond platforms, providing unparalleled stability, durability and adaptability for optimum performance in the maintenance and servicing of a wide range of vehicles.




Double-safety locks



202501edition




SPECIFICATIONS

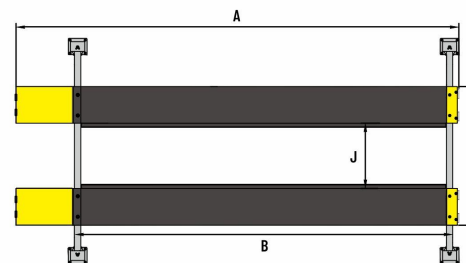

A440/A455

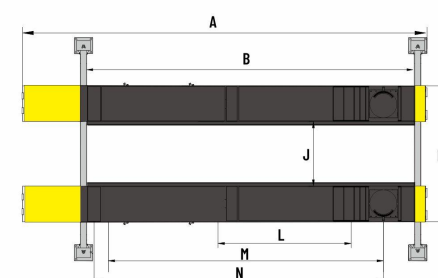

A440A/A455A



Model		A440	A440A	A455	A455A
Style		General service	Alignment	General service	Alignment
Lifting capacity		4000kg	4000kg	5500kg	5500kg
Lifting time		45S	45S	63S	63S
Overall Length (Inc. Ramps)	A	5512mm	5512mm	6092mm	6092mm
Runway Length	B	4442mm	4242mm	5022mm	4822mm
Overall Width	C	3208mm	3208mm	3208mm	3208mm
Width Between Columns	D	2852mm	2852mm	2852mm	2852mm
Max. Lifting Height	E	1870mm	1920mm	1870mm	1920mm
Max. Lifting Height to top of runway		1800mm	1850mm	1800mm	1850mm
Overall Height	F	2185mm	2185mm	2185mm	2185mm
Minimum Height	G	170mm	220mm	170mm	220mm
Max. Underneath Height	H	1730mm	1730mm	1730mm	1730mm
Max. Lock Underneath runway		1660mm	1660mm	1660mm	1660mm
Drive-Thru Clearance	I	2498mm	2498mm	2498mm	2498mm
Width Between Runway	J	1100mm	1100mm	1100mm	1100mm
		85mm~Max.1300mm	85mm~Max.1300mm	1000mm~Max.1300mm	1000mm~Max.1300mm
Outside Edge of Runways	K	2116mm	2116mm	2116mm	2116mm
		1101mm~Max.2316mm	1101mm~Max.2316mm	2016mm~Max.2316mm	2016mm~Max.2316mm
Min. Four Wheel Align	L	/	2000mm	/	2080mm
Max. Four Wheel Align	M	/	3460mm	/	4080mm
Max. Two Wheel Align	N	/	3600mm	/	4230mm
Motor		3.0HP	3.0HP	3.0HP	3.0HP
Gross Weight		921kg	1139kg	1076kg	1342kg

A440/A440A
A455/A455A

AMGO Lift

www.amgolift.com

General Service Model



A440
(4000KG)

A455
(5500KG)

FEATURES

- All commercial-grade with CE certification;
- 24V safe electrical operation system;
- Stepless adjustable width between platforms;
- Integrated non-skid diamond platforms;
- Both auto-activating mechanical lock and air-release safety lock mechanisms;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection mechanism;
- High quality hydraulic cylinder design and manufactured at high standard.
- Well arranged oil hoses and cables to avoid being exposed outside.

Alignment Service Model




A440A
(4000KG)

A455A
(5500KG)

FOUR POST LIFT



Electric control device with **UP**, **LOCK** and **DOWN** buttons.



Double safety locks provide additional safety.



Oil-water separator and solenoid air valve are installed on the power side column.




Stepless adjustable width between platforms;



Non-slip diamond platforms come as standard.



Optional Platform extension kits add an extra 660mm length to the platform.
Kits No.: 40903(A440 A440A)
Kits No.: 41203(A455 A455A)



Optional Turnplate, Kits No. 40101.
Each alignment lift need 2 units.
Only for the model A440A A455A



Optional Air Line Kits.
Kits No. 40102.



Optional Rolling Jacks
RJ-6H: manual hydraulic type 2,800Kg.
RJ-6A: pneumatic hydraulic type 2,800Kg