AMGO Lift

# FOUR POST PARKING LIFTS


The ultimate fusion of engineering and performance, AMGO leads the way in innovation with our commercial-grade parking lift solutions. Combining robust construction with exclusive patented technologies, including the patented concealed lock control system, these lifts maximize space efficiency and provide unrivalled parking convenience with enhanced stability, durability and reliability.



## A430-P/ A430-HP
## A435-P/ A435-HP/ A440-HP



## SPECIFICATIONS

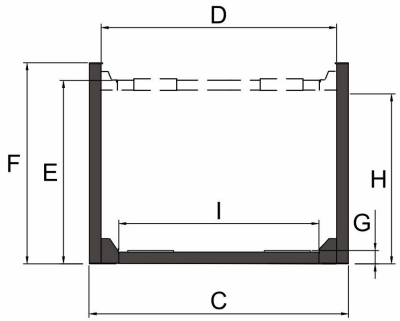





| Model | | A430-P | A430-HP | A435-P | A435-HP | A440-HP |
|---|---|---|---|---|---|---|
| Lifting capacity | | 3000kg | 3000kg | 3500kg | 3500kg | 4000kg |
| lifting time | | 31S | 35S | 40S | 46S | 67S |
| Overall Length ( Inc Ramps) | A | 4720mm | 5008mm | 5285mm | 5285mm | 6049mm |
| Outside edge of crossbeams | B | 3700mm | 3987mm | 4258mm | 4258mm | 5022mm |
| Overall Width | C | 2409mm | 2409mm | 2604mm | 2604mm | 2777mm |
| Width Between Posts | D | 2167mm | 2167mm | 2358mm | 2358mm | 2531mm |
| Max. Lifting Height | E | 1865mm | 2207mm | 1872mm | 2227mm | 2237mm |
| Max. Locking Height | | 1795mm | 2137mm | 1802mm | 2157mm | 2167mm |
| Overall Height | F | 2105mm | 2455mm | 2105mm | 2455mm | 2455mm |
| Minimum Height | G | 125mm | 125mm | 145mm | 145mm | 155mm |
| Max. Underneath Height | H | 1765mm | 2107mm | 1752mm | 2107mm | 2097mm |
| Max. Lock Underneath runway | | 1695mm | 2037mm | 1682mm | 2037mm | 2027mm |
| Drive-Thru Clearance | I | 1956mm | 1956mm | 2074mm | 2074mm | 2247mm |
| Width Between Runways | J | 940mm | 940mm | 940mm | 940mm | 1077mm |
| Outside Edge of Runways | K | 1890mm | 1890mm | 1890mm | 1890mm | 2093mm |
| Motor | | 3.0HP | 3.0HP | 3.0HP | 3.0HP | 3.0HP |
| Gross Weight | | 658kg | 695kg | 715kg | 757kg | 894kg |

# FOUR POST LIFT




EXCLUSIVE FEATURE

Double-S shape column



Standard remote control operation ensures conveninent use.

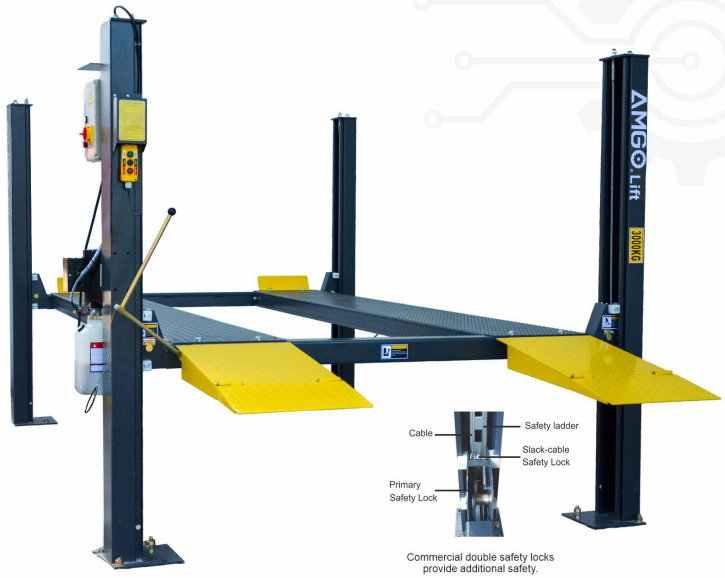


Commercial double safety locks provide additional safety.

## A430-P (3000KG) A430-HP (3000KG) A435-P (3500KG) A435-HP (3500KG)

### FEATURES

- Commercial grade, with CE certification;
- AMGO patented concealed safety lock control with single-point manual release;
- Double-S shaped columns for enhanced strength;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection;
- Standard remote control operation ensures conveninent use;
- Support back to back installation to improve space efficiency;
- Integrated non-skid diamond platforms;
- Foldable drive-on ramps;
- A limit switch is fitted as standard to enhance safety.
- High quality hydraulic cylinder design and manufactured at high standard.




## A440-HP (4000KG)



Patented concealed safety lock control device with single-point manual lock release.
Patent No.: ZL 2023 2 3215814.0



Support back to back installation to improve space efficiency.




Double safety locks provide additional safety.




Optional plastic oil tray (1 set,4pcs)




Optional adjustable Jack Tray (adj. range: 920-1181mm). Kits no. 40816.



Optional Caster Kits (1 set,4pcs) help easily maneuver the parking lift. Kits No.: 40801



Optional rubber wheel chock. P/N: 40811.



Optional extended aluminum alloy drive-in ramps.




Optional Jack with hand pump and 2.5" adapters. J5H sliding jack for A430-P, A430-HP, A435-P, A435-HP J6H rolling jack for A440-HP.