




FOUR POST LIFT

Engineered with advanced AMGO technology—including stepless adjustable platforms—this premium series delivers exceptional versatility. Its oversized width provides ample space to accommodate multiple vehicles effortlessly, ensuring unmatched efficiency and comfort. These commercial-grade lifts are the ultimate productivity solutions for modern automotive service businesses.





**A445/A445A
A455AX**





Double-safety locks

SPECIFICATIONS

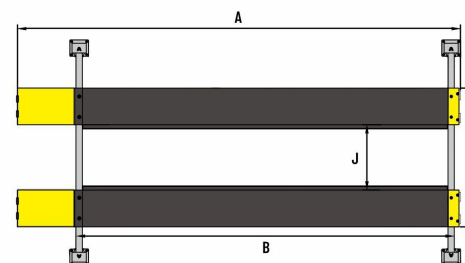

A445

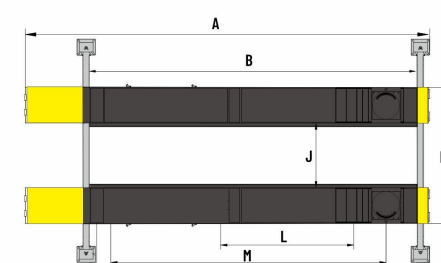

A445A/A455AX

Model		A445	A445A	A455AX
Style		General service	Alignment	Alignment
Lifting capacity		4500kg	4500kg	5500kg
Lifting time		45S	45S	63S
Overall Length (Inc. Ramps)	A	5910mm	5910mm	6092mm
Runway Length	B	4840mm	4640mm	4822mm
Overall Width	C	3356mm	3356mm	3356mm
Width Between Columns	D	3000mm	3000mm	3000mm
Max. Lifting Height	E	1870mm	1920mm	1920mm
Max. Lifting Height to top of runway		1800mm	1850mm	1850mm
Overall Height	F	2185mm	2185mm	2185mm
Minimum Height	G	170mm	220mm	220mm
Max. Underneath Height	H	1730mm	1730mm	1730mm
Max. Lock Underneath runway		1660mm	1660mm	1660mm
Drive-Thru Clearance	I	2646mm	2646mm	2646mm
Width Between Runway	J	1100mm	1100mm	1100mm
		85mm~Max.1365mm	85mm~Max.1365mm	1000mm~Max.1375mm
Outside Edge of Runways	K	2116mm	2116mm	2116mm
		1101mm~Max.2381mm	1101mm~Max.2381mm	2016mm~Max.2391mm
Min. Four Wheel Align	L	/	2080mm	2080mm
Max. Four Wheel Align	M	/	3850mm	4080mm
Max. Two Wheel Align	N	/	4000mm	4230mm
Motor		3.0HP	3.0HP	3.0HP
Gross Weight		1025kg	1282kg	1342kg

AMGO Lift

www.amgolift.com

General Service Model



A445
(4500KG)

FEATURES

- Commercial-grade design;
- 3000mm oversized width between columns, accommodates more vehicles;
- 24V safe electrical operation system;
- Stepless adjustable width between platforms;
- Integrated non-skid diamond platforms;
- Both auto-activating mechanical lock and air-release safety lock mechanisms;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection mechanism;
- High quality hydraulic cylinder design and manufactured at high standard.
- Well arranged oil hoses and cables to avoid being exposed outside.

Alignment Service Model


FOUR POST LIFT



A445A A455AX
(4500KG) (5500KG)




Electric control device with **UP**, **LOCK** and **DOWN** buttons.



Double safety locks provide additional safety.



Oil-water separator and solenoid air valve are installed on the power side column.




Stepless adjustable width between platforms;



Extremely wide of 3000mm between 2 columns to accommodate wide vehicles.




Optional Platform extension kits add an extra 660mm length to the platform.
Kits No.:40903(A445 A445A)
Kits No.:41203(A455AX)



Optional Turnplate, Kits No. 40101.
Each alignment lift need 2 units.
Only for the model A440A A455A



Optional Rolling Jacks
RJ-6H: manual hydraulic type 2,800Kg.
RJ-6A: pneumatic hydraulic type 2,800Kg

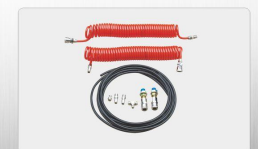

Optional Air Line Kits.
Kits No.40102.